

User-friendly!

Komline-Sanderson Plunger Pump

1

New "leak-free" technology

Greatly minimizes the mess often associated with plunger pumps

2


Enhanced plunger materials

- Hardened, gas nitrided, Class 40 cast iron
- Various hard coatings, such as Aluminum Oxide, Tungsten Carbide or Chrome Oxide

3

Replaceable bearing liner

A separate, replaceable bearing liner allows replacement without disassembly of the pump

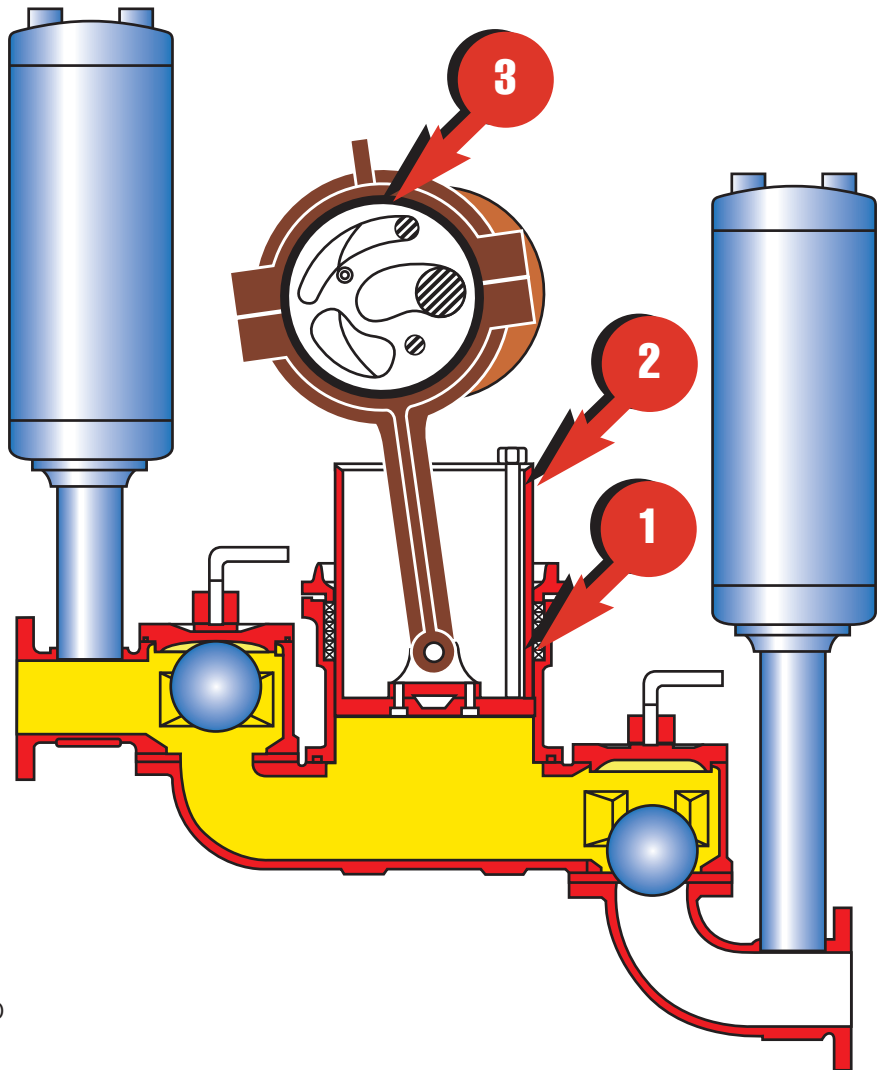

Model KSK Compact

Flow rates up to 90 gpm (5.7 l/s)
Heads up to 180 feet (55 M)
Footprints from 18" wide (460mm)

Model KS, KSS and KSX

Flow rates up to 540 gpm (34 l/s)
Heads up to 230 feet (70 M)

call: **1-800-CALL 4 K-S** (225-5457)

fax: **1-800-FAXS 4 K-S** (329-7457)

mail: **12 Holland Ave
Peapack, NJ 07977**

e-mail: **info@komline.com**

web: **www.komline.com**



Komline-Sanderson